

ALPINE SANITATION & SUPPLIES LTD. 24 Ronson Drive, Unit 16, Etobicoke, Ontario M9W 1B4 Bus: (416)-744-2120 Fax: (416)-249-1859 Toll Free: 1-800 465-6198

L-1X16

Chemical Sanitizing Undercounter Dishwasher




FEATURES:

- 24 racks / 96 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All heavy duty 304 stainless steel construction assures long life and years of trouble free operation.
- 16" high door opening allows the washing of larger items.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Built-in chemical pumps and deliming system assures proper chemical usage.
- Convenient to service "Works-in-a-drawer".
 All electrical components are attached to a sliding drawer for easy access and service.
- Pumped drain allows for flexible installation. Requires no floor drain.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.



Optional dishtable, faucet and pre-rinse unit sold separately.



Requires <u>no</u>floor drain.



Convenient to service "Works-in-a-drawer", may be removed by unplugging one electrical connection.




Upper and lower rotating wash arms guarantee excellent results.



Optional pedestal allows the L-1X16 to be raised up to a full 12" off the floor for easy operator use. Height adjustable from 8" to 12".



Page 1 of 2

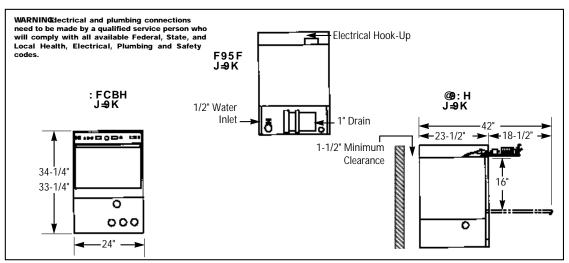

GdYWZWUhicba.

AC89@@%L%	I G5	A9HF <i>=</i> 7		I G5	A9HF <i>=</i> 7
OPERATING CAPACITY			WASH PUMP MOTORS HP	1	1
RACKS PER HOUR (NSF RATED)	24	24	DIMENSIONS		
OPERATING CYCLE	21	21	DEPTH	23-1/2"	(59cm)
WASH TIME-SEC	57	57	WIDTH	24"	(61cm)
RINSE TIME-SEC	48	48	HEIGHT	33-1/4"-34-1/4"	(84-86 cm)
DWELL/PURGE-SEC TOTAL CYCLE TIME	15 120	15 120	MAXIMUM CLEARANCE		
WASH TANK CAPACITY	1.7 GAL.	(6.43 L)	HEIGHT FOR DISHES	16"	(40.64cm)
WASH PUMP CAPACITY	35 GPM	(132 LPM)	STANDARD DISHRACK	1	1
OPERATINGTEMPERATURE			DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)
REQUIRED RECOMMENDED	120°F 140°F	(49°C) (60°C)	ELECTRICAL RATING	VOLTS	AMPS
WATER CONSUMPTION	140 1	(00 C)		115	16
PER RACK	1.7 GAL.	(6.43 L)	SHIPPING WEIGHT		
PER HOUR WATER INLET	40.8 GPH 1/2"	(154 LPH)	APPROXIMATE	196#	(88kg)
DRAIN	1"	-			

Gia a UTmiGdYV1721/UU1jcbg. A cXY`@%L% ÔT CED}^!*^ÁTã^!Á{[å^|ÅᢒË+YFÎÊ4][, Ác{]^!æč!^Ê4\}å^!&[`}c\!É4&@{ 38æ4Áæ)āãāj*É4&[{ { ^!&ãæ4Åäā@; æ@!A[^^o A>O A>ÙØÊ4WŠæ)å ÔWŠ>æ)ãææ4]}Áe3jåÅ&[}•d`&a1}}Á;œ3jåæåå•Á? OXPUWV c@;Á •^Á; ÁÓUUÙYÒÜÁ;!ÁOE>SÁPÒCE/ÓÜÙÈA;@A[[å^|ÅÔE+YFÎÁ#á¢48]}•d; &dE ^*áÁ}ád
ááA) čá
Á: ÁHEI Á cæði /*• Á
Á: ÁNEI Á cæði /*• Á
Á: ÁNEI Á cæði /*• ÁKEI Á cæði á zó á zá á zí á tru če
/* á ÁA: J čá
/* á

5 jU)`UV`Y`Cdh]cbg

- Ùĭ∙cæa∄^¦ÁR^^ær^¦
- Ùæ);ãã≦^¦Á04‡æ;{
- ÔT Œ V^{] ËÜ^{*} ¦^^v ÇÙ^|-Á&[} œ a ð ^å ÁFG, Y Á@ æ æ^¦D
- Ùඎ |^••AÛơ^^|ẤŠ^*•Â ĂĞ ^ơ4 A D
- Ùæiāi |^••ÂÙ¢^|ÁÚ^å^•æi |`ÌÄÁW}å^¦&[``} ◊`¦Æõã @æà|^
- \dot{O} \wedge 8d as \dot{A} \dot{A}